

GENERAL GOLD

AIR CONDITIONERS



2023

CATALOGUE





GENERAL GOLD

28.0
ECO & T3 CONTROL AMPERE LEVELS

ECO & T3
CONTROL
AMPERE
LEVELS

KEEPING COOL, EVEN IF YOU NEAR VOLCANO
ENDURE UP TO 60°



**ECO & T3
SCROLL
COMPRESSOR**



T3 | R410A | GMCC

Ampere
Control

Inverter



T3

Healthy
Filter


Refrigerant

Golden
FinTurbo
ModeRapid
Cooling

Quiet

4-Way auto
Swing

Model name	GG-TS12000 TITANUM	GG-TS18000 TITANUM	GG-TS24000 TITANUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Amper Levels(L1,L2,L3)	2A, 3A, 4A	3A, 4A, 6A	4A, 6A, 8A
Cooling			
Capacity(Btu/h)	12000	18000	24000
Rated current(A)	/	/	/
EER(W/W)	2.4	2.4	2.4
Heating			
Capacity(Btu/h)	12500	18500	24500
Rated current(A)	/	/	/
COP(W/W)	3.60	3.60	3.60
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	SANYO
Indoor air flow(m3/h)	680	810	1350
Indoor sound level(dB(A))	28	31	36
Refrigerant type	R410A	R410A	R410A
Loading Qty(40HQ)	255	177	120
Indoor unit			
Dimensions(W*D*H)	820*306*195	920*306*195	1100*333*222
Net weight(KG)	9.5	10.5	15
Outdoor unit			
Dimensions(W*D*H)	795*305*549	853*349*602	967*421*803
Net weight(KG)	24.5	30	59
Number of rows radiator	1	2	2

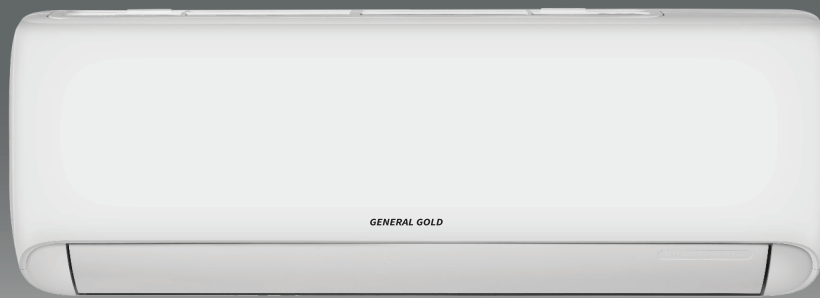T3 | R410A | Ampere
Control

Inverter



T3



WiFi



Refrigerant

Golden
FinTurbo
ModeRapid
Cooling

Quiet

4-Way auto
Swing**Model name****GG-GS30000 PORSCHE**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Amper Levels(L1,L2,L3)

L1 (4A) - L2 (9A) - L3(12A)

Cooling

Capacity(Btu/h)

30000

Rated current(A)

/

EER(W/W)

3.22

Heating

Capacity(Btu/h)

30700

Rated current(A)

12.5

COP(W/W)

3.22

Compressor & Features

Type

ROTARY

Brand



Indoor air flow(m3/h)

1350

Indoor sound level(dB(A))

52

Refrigerant type

R410A

Loading Qty(40HQ)

108

Indoor unit

Dimensions(W*D*H)

1078*333*246

Net weight(KG)

15

Outdoor unit

Dimensions(W*D*H)


1000*746*427

Net weight(KG)

52.5

Number of rows radiator

2

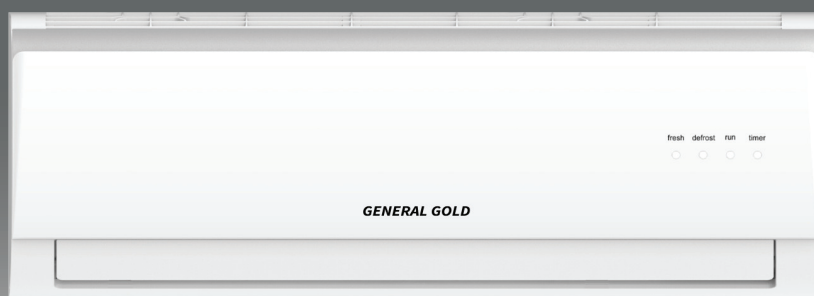

R410A | GMCC

									
Refrigerant	High Efficiency	Timer Mode	Healthy Filter	Operation in low temperature	Golden Fin	Turbo Mode	Rapid Cooling	Quiet	4-Way auto Swing

Model name	GG-MS12000 PLATINUM	GG-MS18000 PLATINUM	GG-MS24000 PLATINUM
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling			
Capacity(Btu/h)	12000	18000	24000
Rated current(A)	5.2	7.71	10
EER(W/W)	2.81	2.81	3.01
Heating			
Capacity(Btu/h)	12500	18000	27000
Rated current(A)	5.0	7	10
COP(W/W)	3.21	3.01	3.41
Compressor & Features			
Type	ROTARY	ROTARY	ROTARY
Brand	GMCC	GMCC	GMCC
Indoor air flow(m3/h)	575	810	1000
Indoor sound level(dB(A))	28	34	33
Refrigerant type	R410A	R410A	R410A
Loading Qty(40HQ)	265	192	147
Indoor unit			
Dimensions(W*D*H)	805*194*285	957*213*302	1040*220*327
Net weight(KG)	8.2	11.4	13.2
Outdoor unit			
Dimensions(W*D*H)	720*270*495	805*330*554	890*342*673
Net weight(KG)	26.5	37.6	53
Number of rows radiator	1	1.6	1.6



R410A | GMCC



R410A

High
Efficiency

Timer Mode

Healthy
FilterOperation in
low temperatureGolden
FinTurbo
ModeRapid
Cooling

Quiet

4-Way auto
Swing**Model name****GG-MS30 VITALLY**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

Capacity(Btu/h)

30000

Rated current(A)

11.7

EER(W/W)

3.3

Heating

Capacity(Btu/h)

30500

Rated current(A)

10.9

COP(W/W)

3.66

Compressor & Features

Type

ROTARY

Brand

GMCC

Indoor air flow(m3/h)

1460

Indoor sound level(dB(A))

40

Refrigerant type

R410A

Loading Qty(40HQ)

96

Indoor unit

Dimensions(W*D*H)

1260*283*362

Net weight(KG)

21.8

Outdoor unit

Dimensions(W*D*H)

946*410*810

Net weight(KG)

63.9

Number of rows radiator

2

T3 | R410A | **HIGHLY**Ampere
Control

Inverter



T3

Healthy
FilterAuto
RestartGolden
FinTurbo
ModeRapid
Cooling

Quiet

4-Way auto
Swing**Model name****GG-TF60000D TITANUM****Power supply(V-Ph-Hz)**

220-240V, 50Hz, 1Ph

Amper Levels(L1,L2,L3)

L1 (8 A) - L2 (12 A) - L3(15 A)

Cooling

Capacity(Btu/h)

60000

Rated current(A)

/

EER(W/W)

2

Heating

Capacity(Btu/h)

62000

Rated current(A)

26.7

COP(W/W)

3.60

Compressor & Features

Type

ROTARY

Brand

HIGHLY

Indoor air flow(m3/h)

2100

Indoor sound level(dB(A))

49

Refrigerant type

R410A

Loading Qty(40HQ)

45

Indoor unit

Dimensions(W*D*H)

1918 x600x390

Net weight(KG)

/

Outdoor unit

Dimensions(W*D*H)

1000×400×1250

Net weight(KG)

/

Number of rows radiator

3



T3 | R410A | GMCC



R410A

Refrigerant



High Efficiency



65°C

T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name**GG-TF36000H ULTRA**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

Capacity(Btu/h)

36000

Rated current(A)

17.3

EER(W/W)

2.4

Heating

Capacity(Btu/h)

36500

Rated current(A)

14.1

COP(W/W)

12.3

Compressor & Features

Type

Rotary

Brand

GMCC

Indoor air flow(m3/h)

1680

Indoor sound level(dB(A))

40

Refrigerant type

R410A

Loading Qty(40HQ)

62

Indoor unit

Dimensions(W*D*H)

600*390*1918

Net weight(KG)

51

Outdoor unit

Dimensions(W*D*H)

984*421*804

Net weight(KG)

69

Number of rows radiator

2

T3 | R410A | **HIGHLY**

R410A

Refrigerant



High Efficiency



65°C

T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name**GG-TF36000 ULTRA**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

Capacity(Btu/h)

36000

Rated current(A)

17.7

EER(W/W)

2.4

Heating

Capacity(Btu/h)

38000

Rated current(A)

14.6

COP(W/W)

12.3

Compressor & Features

Type

Rotary

Brand

HIGHLYIndoor air flow(m³/h)

1900

Indoor sound level(dB(A))

39

Refrigerant type

R410A

Loading Qty(40HQ)

54

Indoor unit

Dimensions(W*D*H)

600*390*1918

Net weight(KG)

55

Outdoor unit

Dimensions(W*D*H)

976*421*804

Net weight(KG)

59

Number of rows radiator

2

T3 | R410A | **Copeland**

R410A

Refrigerant

Scroll
Compressor

65°C

T3

Healthy
FilterAuto
RestartGolden
FinTurbo
ModeRapid
Cooling

Quiet

4-Way auto
Swing**Model name****GG-MF36000DC SCROLL**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

36000

Capacity(Btu/h)

19.4

Rated current(A)

2.29

EER(W/W)

Heating

Capacity(Btu/h)

/

Rated current(A)

/

COP(W/W)

/

Compressor & Features

Type

SCROLL

Brand

Copeland

Indoor air flow(m3/h)

1690

Indoor sound level(dB(A))

62

Refrigerant type

R410A

Loading Qty(40HQ)

42

Indoor unit

Dimensions(W*D*H)

600*455*1934

Net weight(KG)

59.0

Outdoor unit

Dimensions(W*D*H)

900*350*1170

Net weight(KG)

87.5

Number of rows radiator

2



T3 | R410A | SANYO



Refrigerant



Scroll Compressor



T3



Healthy Filter



Auto Restart



Golden Fin



Turbo Mode



Rapid Cooling



Quiet



4-Way auto Swing

Model name**GG-TF48000D SCROLL**

Power supply(V-Ph-Hz)

380V , 50Hz , 3Ph

Cooling

Capacity(Btu/h)

48000

Rated current(A)

20.2

EER(W/W)

3.30

Heating

Capacity(Btu/h)

18.9

Rated current(A)

3.60

COP(W/W)

Compressor & Features

Type

SCROLL

Brand

SANYO

Indoor air flow(m3/h)

1950

Indoor sound level(dB(A))

41

Refrigerant type

R410A

Loading Qty(40HQ)

45

Indoor unit

Dimensions(W*D*H)

1918*600*390

Net weight(KG)

55

Outdoor unit

Dimensions(W*D*H)

1000×400×1250

Net weight(KG)

105

Number of rows radiator

2



T3 | R410A | LG



Refrigerant

Scroll
Compressor

T3

Healthy
FilterAuto
RestartGolden
FinTurbo
ModeRapid
Cooling

Quiet

4-Way auto
Swing**Model name****GG-MF60000D SCROLL**

Power supply(V-Ph-Hz)

220-240V, 50Hz, 1Ph

Cooling

60000

Capacity(Btu/h)

10.1

Rated current(A)

3.30

EER(W/W)

Heating

Capacity(Btu/h)

60000

Rated current(A)

9.67

COP(W/W)

3.66

Compressor & Features

Type

SCROLL

Brand



Indoor air flow(m3/h)

2470

Indoor sound level(dB(A))

50

Refrigerant type

R410A

Loading Qty(40HQ)

40

Indoor unit

Dimensions(W*D*H)

600x455x1934

Net weight(KG)

59.3

Outdoor unit

Dimensions(W*D*H)

952x415x1333

Net weight(KG)

105.2

Number of rows radiator

2



T3 | GMCC

High
Efficiency

Refrigerant



T3

Healthy
FilterAuto
RestartGolden
FinTurbo
ModeRapid
Cooling

Quiet

Easy
Installation

Model name	GG-MW9000C ULTRA	GG-MW12000C ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity(Btu/h)	9000	12000
Rated current(A)	4.5	7.0
EER(W/W)	2.6	2.08
Heating		
Capacity(Btu/h)	/	/
Rated current(A)	/	/
COP(W/W)	/	/
Compressor & Features		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow(m3/h)	360	450
Indoor sound level(dB(A))	47	46
Refrigerant type	R22	R22
Loading Qty(40HQ)	572	342
Indoor unit		
Dimensions(W*D*H)	450*535*346	600*560*380
Net weight(KG)	27	36
Outdoor unit		
Dimensions(W*D*H)	/	/
Net weight ^(KG)	/	/
Number of rows radiator	/	/



T3 | GMCC

High
Efficiency

Refrigerant



T3

Healthy
FilterAuto
RestartGolden
FinTurbo
ModeRapid
Cooling

Quiet

Easy
Installation

Model name	GG-MW18000C ULTRA	GG-MW24000 ULTRA
Power supply(V-Ph-Hz)	220-240V, 50Hz, 1Ph	220-240V, 50Hz, 1Ph
Cooling		
Capacity(Btu/h)	18000	24000
Rated current(A)	11.02	12.5
EER(W/W)	1.92	1.90
Heating		
Capacity(Btu/h)	/	24000
Rated current(A)	/	15.7
COP(W/W)	/	0.89
Compressor & Features		
Type	Rotary	Rotary
Brand	GMCC	GMCC
Indoor air flow(m3/h)	730	805
Indoor sound level(dB(A))	50	55
Refrigerant type	R22	R22
Loading Qty(40HQ)	255	255
Indoor unit		
Dimensions(W*D*H)	660*680*428	660*680*428
Net weight(KG)	52	56.5
Outdoor unit		
Dimensions(W*D*H)	/	/
Net weight ^(KG)	/	/
Number of rows radiator	/	/

GENERAL GOLD

AIR CONDITIONERS

2023

CATALOGUE

